



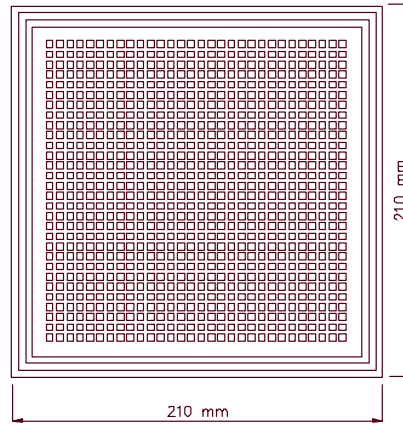

ISO 9001 CERTIFIED

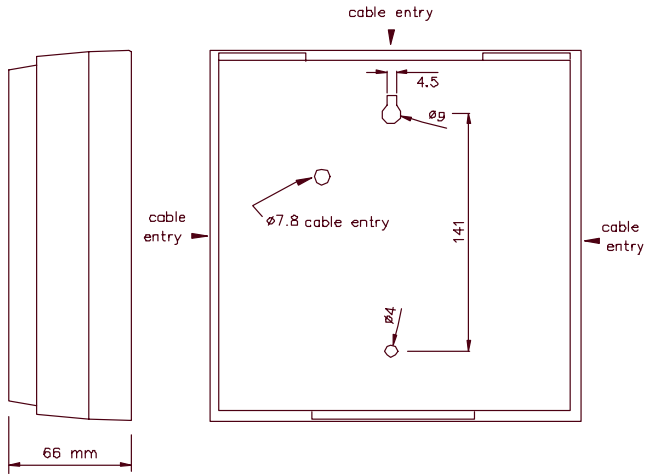

Transformer:  
 Combined  
 50 / 100 Volt line  
 5(White) : 6(Green) 50V  
 5(White) : 8(Red) 100V

Secondary nominal  
 tapings:  
 1 : 4 6,0W  
 1 : 3 3,0W  
 2 : 4 2,0W  
 1 : 2 1,5W  
 3 : 4 0,9 W  
 2 : 3 0,5 W

1W/1m Pink Noise 1/3 octave bands



Material / Colour ..... ABS / Light grey (RAL 9002)  
 Mounting ..... Screws and keyhole  
 Termination ..... Spring clamp  
 Weight ..... 1,0 kg  
 IP-rating .....  
 Max. / min. amb. temp ..... 90°C / -20°C  
 Standard version ..... 50 / 100 V transformer  
 Rated / max. power ..... 6 W / 8 W  
 SPL 1W/1m ..... 90 dB  
 SPL rated power ..... 97 dB  
 Effective freq. range ..... 160 – 14000 Hz  
 Dispersion (-6dB) 1kHz / 4kHz ..... 170° / 50°  
 Directivity factor, Q.....

### Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Screw the backplate to wall or ceiling. Select a cable entry, connect cable to terminal and "clip on" the cabinet.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

