


Transformer:
100 Volt line

Primary nominal
tappings:

1 : 2	6,0 W
2 : 3	3,0 W
3 : 4	1,5 W
1 : 3	1,0 W
2 : 4	0,5 W
1 : 4	0,3 W

1 = Black, 2 = Yellow
3 = Brown, 4 = Blue

1W/1m Pink Noise 1/3 octave bands

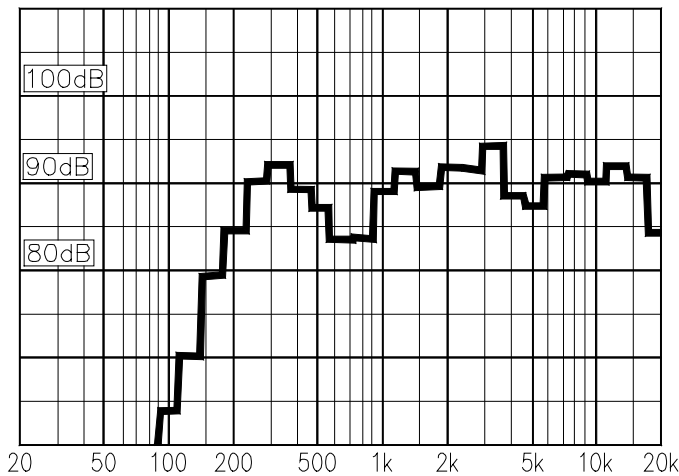

Material / Colour..... Aluminium / RAL9010 or anodized
Mounting Bracket
Termination Cable 0,25m
Weight 2,1 kg
IP-rating 53
Max.* / min. amb. temp..... 150 °C / -40 °C
Standard version 100 V transformer
Rated / max. power 6 W / 8 W
SPL 1W/1m..... 92 dB
SPL rated power 99 dB
Effective freq. range 150 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz 150° / 75°
Directivity factor, Q.....

*Tested and approved by NEMKO to withstand flames for more than 30 minutes, and 150°C for 24 hrs.

Installation, Operation and Maintenance Procedures

- Screw one part of the bracket to wall or ceiling. Slide cabinet back into wanted angel of cabinet. Secure the cabinet to the bracket with the set screw.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- CAP-6F is certified by NEMKO to withstand flames for more than 30 minutes and 150°C for 24 hours.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

