


50 V / 100 V combined transformer:

Primary connection:
 5 (White) : 6 (Green) 50 V
 5 (White) : 8 (Red) 100 V

Secondary nominal tapings:

1 : 4	4,0 W
1 : 3	2,0 W
2 : 4	1,3 W
1 : 2	1,0 W
3 : 4	0,5 W
2 : 3	0,3 W

1W/1m Pink Noise 1/3 octave bands

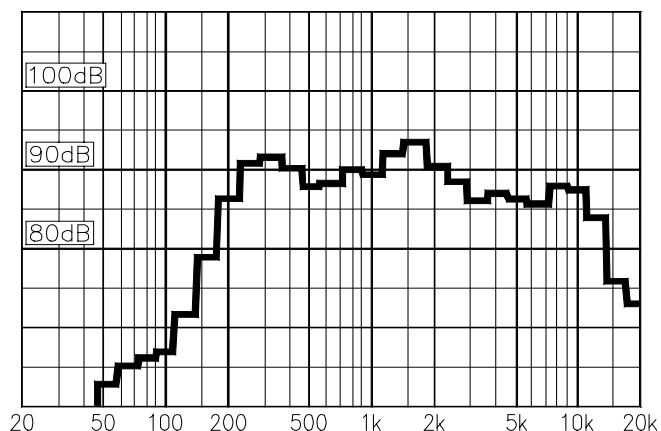

Material / Colour..... Aluminium / RAL 7035
 Mounting Bracket
 Termination Spring clamp
 Weight 1,9 kg
 IP-rating..... 55
 Max. / min. amb. temp 90°C / -40°C
 Standard version 100 V / 50 V transformer
 Rated / max. power 4 W / 6 W
 SPL 1W/1m..... 90 dB
 SPL rated power 96 dB
 Effective freq. range 160 – 16000 Hz
 Dispersion (-6dB) 1kHz / 4kHz..... 160° / 110°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- To change the position of the loudspeaker adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- Fasten lid with a torque of 2 - 3 Nm.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

