

MD-200 is available with transformer on request:


100 V line.

Primary nominal tappings:

1 : 2 200 W
 1 : 3 100 W
 1 : 4 50 W

MD-200 is supplied with M8 stainless steel threaded inserts for mounting purposes. Deviation from the given mounting-hole dimensions might be ± 2 mm.

1W/1m Pink Noise 1/3 octave bands

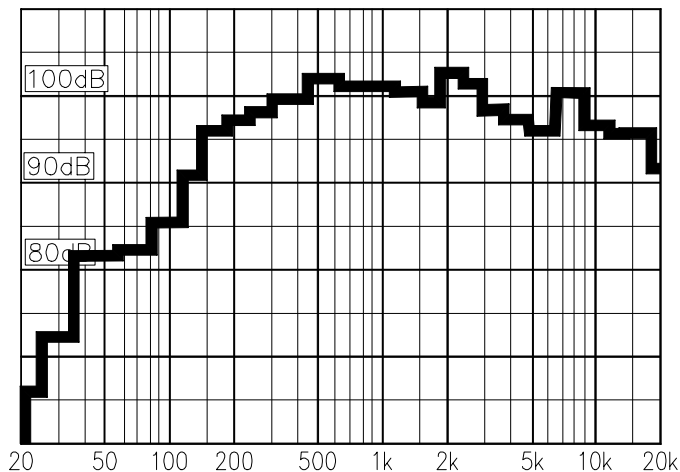

Material / Colour..... Polyethylene / Black or RAL 5003
 Mounting Bracket, wire or Tripod
 Termination Screw terminals
 Weight (Without mounting system) 13,3 kg
 IP-rating..... 54
 Max. / min. amb. temp 90°C / -40°C
 Standard version 8Ω
 Rated / max. power 200 W / 300 W
 SPL 1W/1m..... 100 dB
 SPL rated power..... 123 dB
 Effective freq. range 60 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz..... 90° / 60°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- MD-200 is available with 200 W transformer and a bracket systems on request.
- If the loudspeaker is supplied with the bracket system, mount the part with a slit on each side to the loudspeaker with four M8 screws, and the other part of the bracket to the wall or ceiling with four screws. Mount two fastening screws to the fixed part in the treaded holes, and slide the loudspeaker on to these screws. Tighten the screws in wanted position, and secure the bracket with four extra bolts and nuts, two on each side of the bracket.
- The loudspeaker is delivered with M8 threaded inserts for mounting purposes.
- For optimum performance, always use the correct power and operate within the frequency limits as stated.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

