

Proci-100 is available with transformer on request:


50 or 100 Volt line

Primary nominal tapings:

1 : 2 100,0W
 1 : 3 50,0W
 1 : 4 25,0W

5 : 6 8,0 Ohm

1W/1m Pink Noise 1/3 octave bands

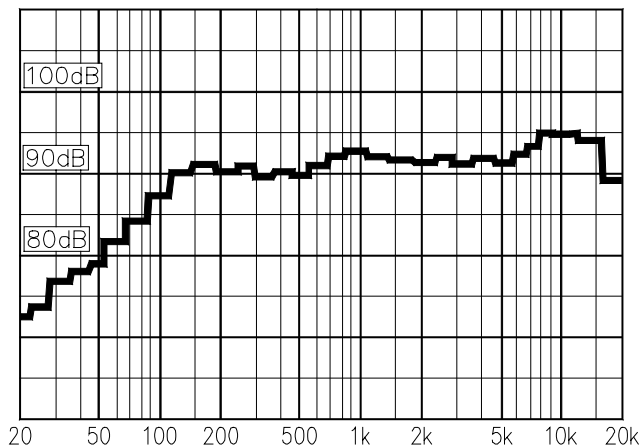

Material / Colour..... Particle board / Black or white
 Mounting Brackets
 Termination Spring terminal
 Weight 8,7 kg
 IP-rating
 Max. / min. amb. temp 90°C / -20°C
 Standard version 8Ω
 Rated / max. power 100 W /150 W
 SPL 1W/1m..... 90 dB
 SPL rated power 112 dB
 Effective freq. range 50 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 160° / 70°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- Proci-100 is available with 100 W transformer.
- Connect cable to terminal and screw bracket to wall with screws, and fasten bracket to cabinet at top and bottom.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Take care when loudspeaker is energized (100V).
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

