


Transformer:  
 Combined  
 50 / 100 Volt line  
 5(White) : 6(Green) 50V  
 5(White) : 8(Red) 100V

Secondary nominal  
 tapings:  
 1 : 4 30,0W  
 1 : 3 15,0W  
 2 : 4 10,0W  
 1 : 2 7,5W  
 3 : 4 3,5 W  
 2 : 3 2,0 W

Rec. ceiling hole:  $\varnothing 182 - \varnothing 195$  mm

1W/1m Pink Noise 1/3 octave bands

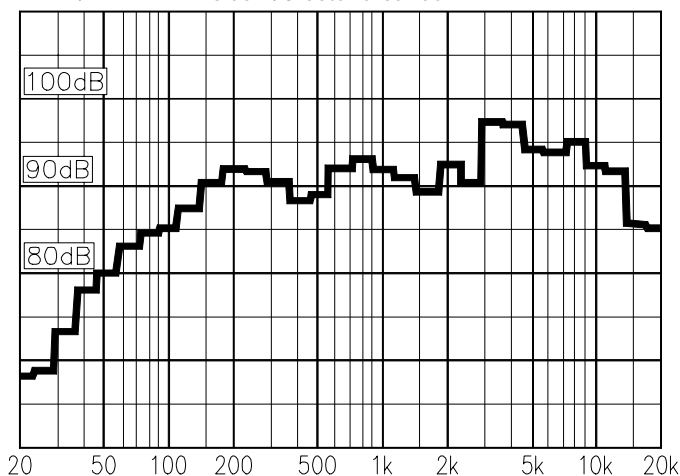

Material / Colour.....ABS grille, Polystyrene box / White  
 Mounting ..... 3 screws  
 Termination ..... Spring clamps  
 Weight ..... 1,7 kg  
 IP-rating .....  
 Max. / min. amb. temp ..... 90°C / -20°C  
 Standard version ..... 50 / 100 V transformer  
 Rated / max. power ..... 30 W / 50 W  
 SPL 1W/1m..... 90 dB  
 SPL rated power ..... 104 dB  
 Effective freq. range ..... 60 – 20000 Hz  
 Dispersion (-6dB) 1kHz / 4kHz ..... 130° / 50°  
 Directivity factor, Q.....

## Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- Install box by turning 3 screws clockwise and the 3 hooks will keep loudspeaker in position. Connect cable to terminal and screw loudspeaker grill clockwise into fixed position.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

