

Transformer:
100 Volt line


5(Blue) : 8(Yellow) 100V

Secondary nominal
tappings:

1 : 4	6,0W
1 : 3	3,0W
2 : 4	2,0W
1 : 2	1,5W
3 : 4	0,9 W
2 : 3	0,5 W

Rec. ceiling hole: \varnothing 180 mm

1W/1m Pink Noise 1/3 octave bands

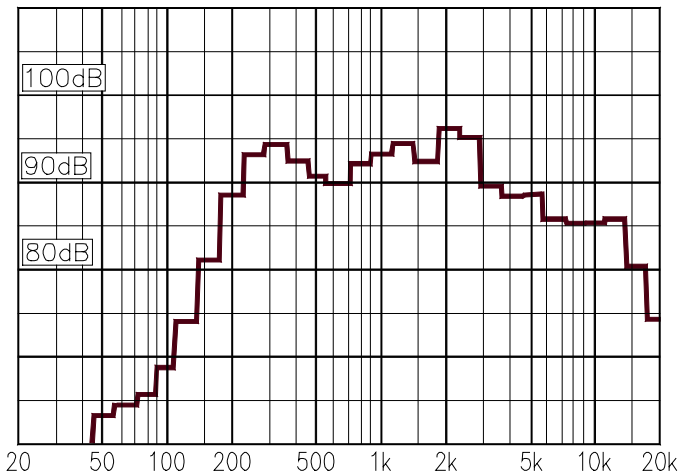

Material / Colour	Aluminium / RAL9010
Mounting	4 screws
Termination	Spring clamps
Weight	1,1 kg
IP-rating	42
Max. / min. amb. temp	150°C / -30°C
Standard version	50 / 100 V transformer
Rated / max. power	6 W / 15 W
SPL 1W/1m	90 dB
SPL rated power	97 dB
Effective freq. range	130 – 18000 Hz
Dispersion (-6dB) 1kHz / 4kHz	130° / 60°
Directivity factor, Q	

Installation, Operation and Maintenance Procedures

- Lead the cable through cable inlet in to alu-box and connect to terminal.
- Screw box to loudspeaker grill and install loudspeaker by four screws.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- BF-620F(T) is designed to withstands flames for 30 min. and 150°C for 24 hours.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

