


Transformer:
100 Volt line

Primary nominal
tappings:

1 : 2	15 W
2 : 3	7,5 W
3 : 4	3,5 W
1 : 3	2,8 W
2 : 4	1,3 W
1 : 4	0,7 W
1 : 5	8Ω

1 = Red, 2 = Yellow
3 = Green, 4 = Blue
5 = Black

1W/1m Pink Noise 1/3 octave bands

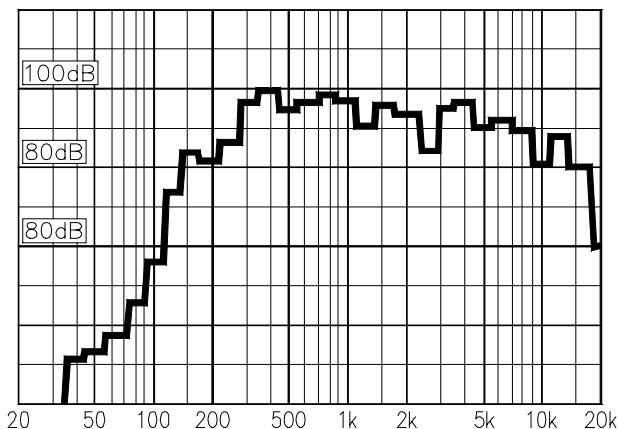

Material / Colour..... ABS, polypropylene / RAL 7035
 Mounting Aluminium bracket
 TerminationScrew terminals in termination chamber
 Weight 3,5 kg
 IP-rating 55
 Max. / min. amb. temp 90°C / -40°C
 Standard version 100 V transformer
 Rated / max. power 15 W / 25 W
 SPL 1W/1m..... 99 dB
 SPL rated power 110 dB
 Effective freq. range 140 – 16000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 65° / 20°
 Directivity factor, Q (2 kHz) 27

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- To change the position of the loudspeaker adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- Fasten lid with a torque of 1-2 Nm.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

