


1W/1m Pink Noise 1/3 octave bands

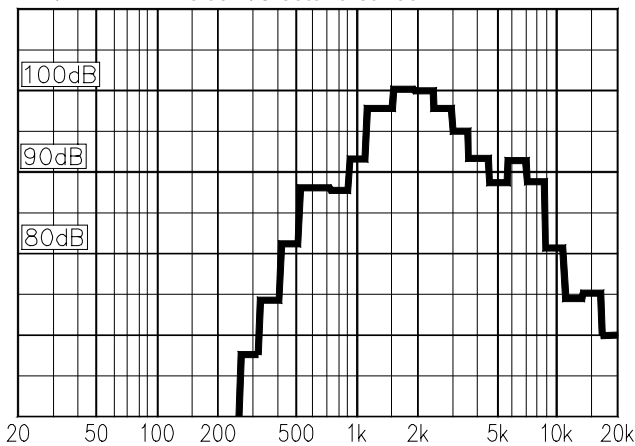

Material / Colour.....ABS, Polyamide / RAL 7035
 Mounting Insertion
 Termination Cable 0,5m
 Weight 0,8 kg
 IP-rating 67
 Max. / min. amb. temp 90 °C / -40 °C
 Standard version 8 Ω
 Rated / max. power 6 W / 15 W
 SPL 1W/1m 100 dB
 SPL rated power 107 dB
 Effective freq. range 500 – 7500 Hz
 Dispersion (-6dB) 1kHz / 4kHz 170° / 70°
 Directivity factor, Q (2kHz) 4,3

Installation, Operation and Maintenance Procedures

- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Fasten lid with a torque of 1 - 2 Nm.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

