


Transformer:  
100 Volt line

Primary nominal  
tappings:

1 : 2	30,0 W
2 : 3	15,0 W
3 : 4	7,5 W
1 : 3	5,5 W
2 : 4	2,7 W
1 : 4	2,0 W
1 : 5	8Ω

1 = Red, 2 = Yellow  
3 = Green, 4 = Blue  
5 = Black

### 1W/1m Pink Noise 1/3 octave bands

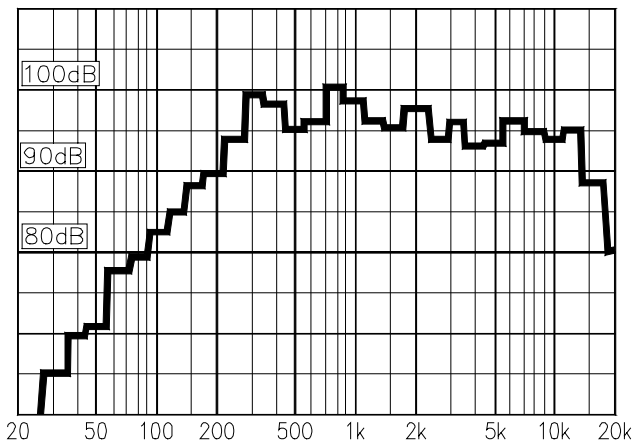

Material / Colour..... ABS, Polypropylene / RAL 7035  
 Mounting ..... Aluminium bracket  
 Termination .....Screw terminals in termination chamber  
 Weight ..... 4,2 kg  
 IP-rating ..... 55  
 Max. / min. amb. temp ..... 90°C / -40°C  
 Standard version ..... 100 V transformer  
 Rated / max. power ..... 30 W / 50 W  
 SPL 1W/1m ..... 96 dB  
 SPL rated power ..... 110 dB  
 Effective freq. range ..... 85 – 16000 Hz  
 Dispersion (-6dB) 1kHz / 4kHz ..... 65° / 30°  
 Directivity factor, Q.....

## Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- To change the position of the loudspeaker adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- Fasten termination chamber lid with a torque of 1-2 Nm.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

