


Transformer:
100 Volt line

Primary nominal
tappings:

1 : 2	50,0 W
2 : 3	25,0 W
3 : 4	12,5 W
1 : 3	9,0 W
2 : 4	4,5 W
1 : 4	3,5 W
1 : 5	8Ω

1 = Red, 2 = Yellow
3 = Green, 4 = Blue
5 = Black

1W/1m Pink Noise 1/3 octave bands

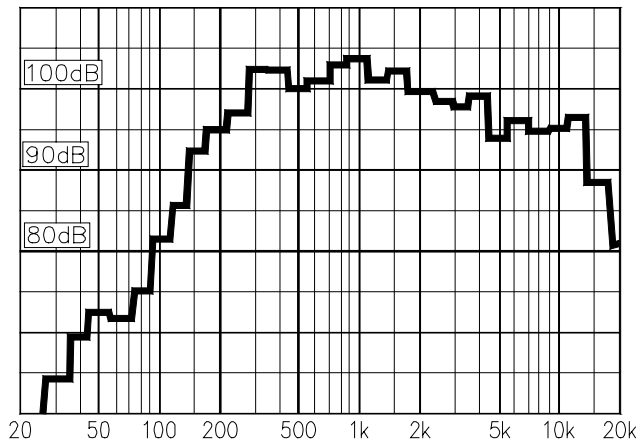

Material / Colour.....	ABS, Polypropylene / RAL 7035
Mounting	Aluminium bracket
Termination	Screw terminals in termination chamber
Weight	4,5 kg
IP-rating	55
Max. / min. amb. temp	90°C / -40°C
Standard version	100 V transformer
Rated / max. power	50 W / 80 W
SPL 1W/1m.....	104 dB
SPL rated power.....	121 dB
Effective freq. range	140 – 16000 Hz
Dispersion (-6dB) 1kHz / 4kHz.....	65° / 20°
Directivity factor, Q.....	

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- To change the position of the loudspeaker adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- Fasten termination chamber lid with a torque of 1-2 Nm.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

