
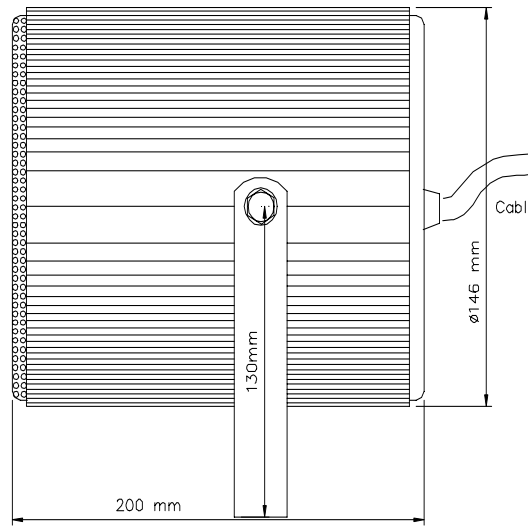



Transformer:
100 Volt line

Prim nominal tapings:
1 : 2 15 W
2 : 3 7,5 W
3 : 4 4,0 W
1 : 3 2,7 W
2 : 4 1,3 W
1 : 4 0,8 W

1 = Red, 2 = Yellow
3 = Green, 4 = Blue

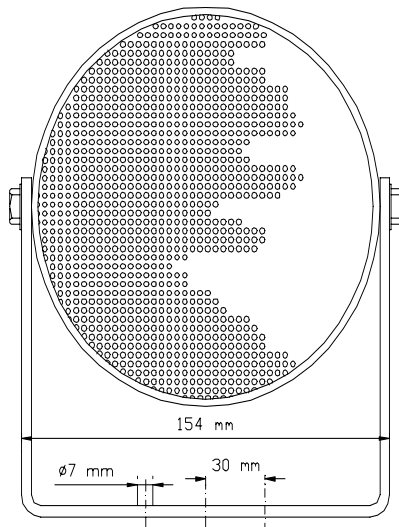

1W/1m Pink Noise 1/3 octave bands

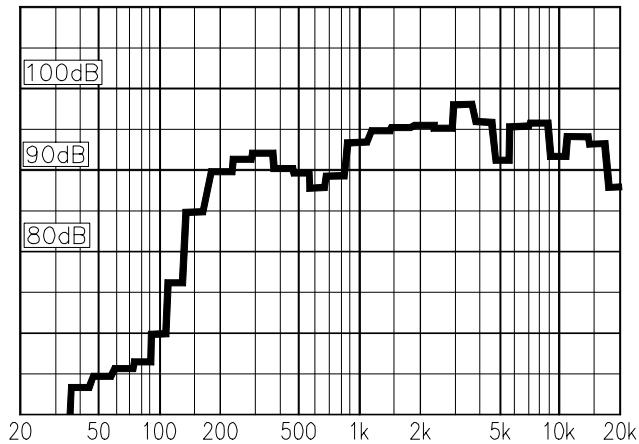

Material / Colour..... Aluminium / RAL9010 or anodized
Mounting Bracket
Termination Cable, 1 m
Weight 2,1 kg
IP-rating
Max. / min. amb. temp 90°C / -40 °C
Standard version 100 V transformer
Rated / max. power 15 W / 20 W
SPL 1W/1m..... 92 dB
SPL rated power 103 dB
Effective freq. range 150 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz 130° / 50°
Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

