


1W/1m Pink Noise 1/3 octave bands 2m below surface.

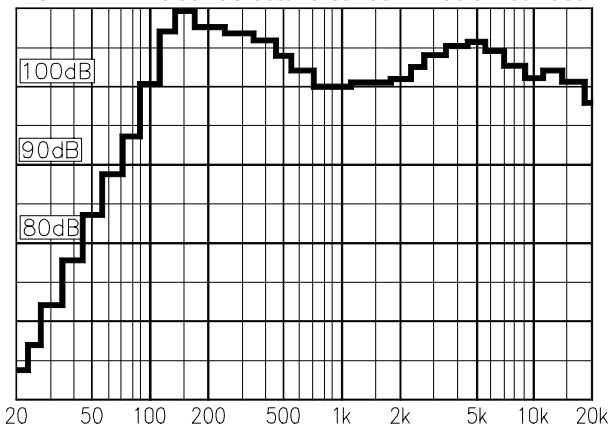

Material / Colour.....	ABS / NCS 1070-B, (Blue)
Mounting	4 screws or bracket
Termination	Cable, 5 m
Weight	2,2 kg
IP-rating	68
Max. / min. amb. temp	90°C / -20°C
Standard version8Ω
Rated / max. power	20 W / 30 W
SPL 1W/1m (submerged)	105 dB
SPL rated power	118 dB
Effective freq. range	80 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	180° / 180°
Directivity factor, Q.....	

Installation, Operation and Maintenance Procedures

- Use 4 screws for mounting on wall, alternative flush mounting.
- When mounting with optional bracket, use the slit on each side to connect the bracket to the loudspeaker.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Please exercise care when installing submerged. This loudspeaker generates very high sound pressures even when driven at low power.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

