


Rec. ceiling hole:  $\varnothing$  167 mm

Transformer: Combined  
 50 / 100 Volt line  
 5(White) : 6(Green) 50V  
 5(White) : 8(Red) 100V

Secondary nominal  
 tapings:

1 : 4	6,0 W
1 : 3	3,0 W
2 : 4	2,0 W
1 : 2	1,5 W
3 : 4	0,9 W
2 : 3	0,5 W

1W/1m Pink Noise 1/3 octave bands

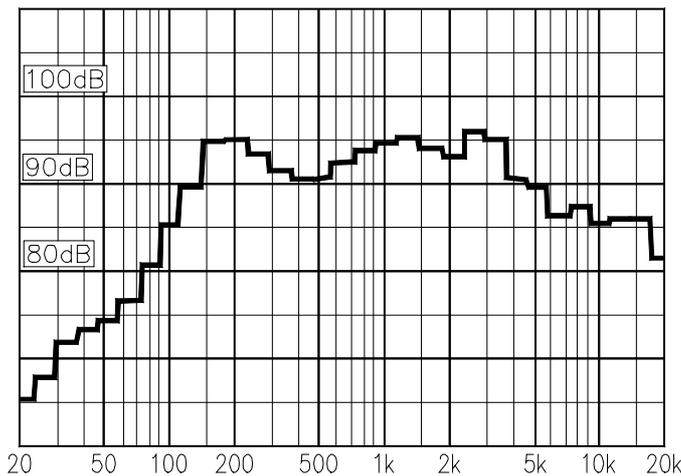

Material / Colour ..... Steel / RAL9010  
 Mounting ..... 2 screws, Bracket  
 Termination ..... Spring clamps  
 Weight ..... 1,0 kg  
 IP-rating .....  
 Max. / min. amb. temp ..... 90°C / -20°C  
 Standard version ..... 50 / 100 V transformer  
 Rated / max. power ..... 6 W / 15 W  
 SPL 1W/1m ..... 90 dB  
 SPL rated power ..... 97 dB  
 Effective freq. range ..... 90 – 20000 Hz  
 Dispersion (-6dB) 1kHz / 4kHz ..... 170° / 60°  
 Directivity factor, Q .....

## Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- Connect to terminal. Install loudspeaker to wall / ceiling by means of 2 screws. Screw loudspeaker grill into fixed position.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Take care when loudspeaker is energized (100 V).
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

