




*explosion-proof, weatherproof  
Industrial telephone*

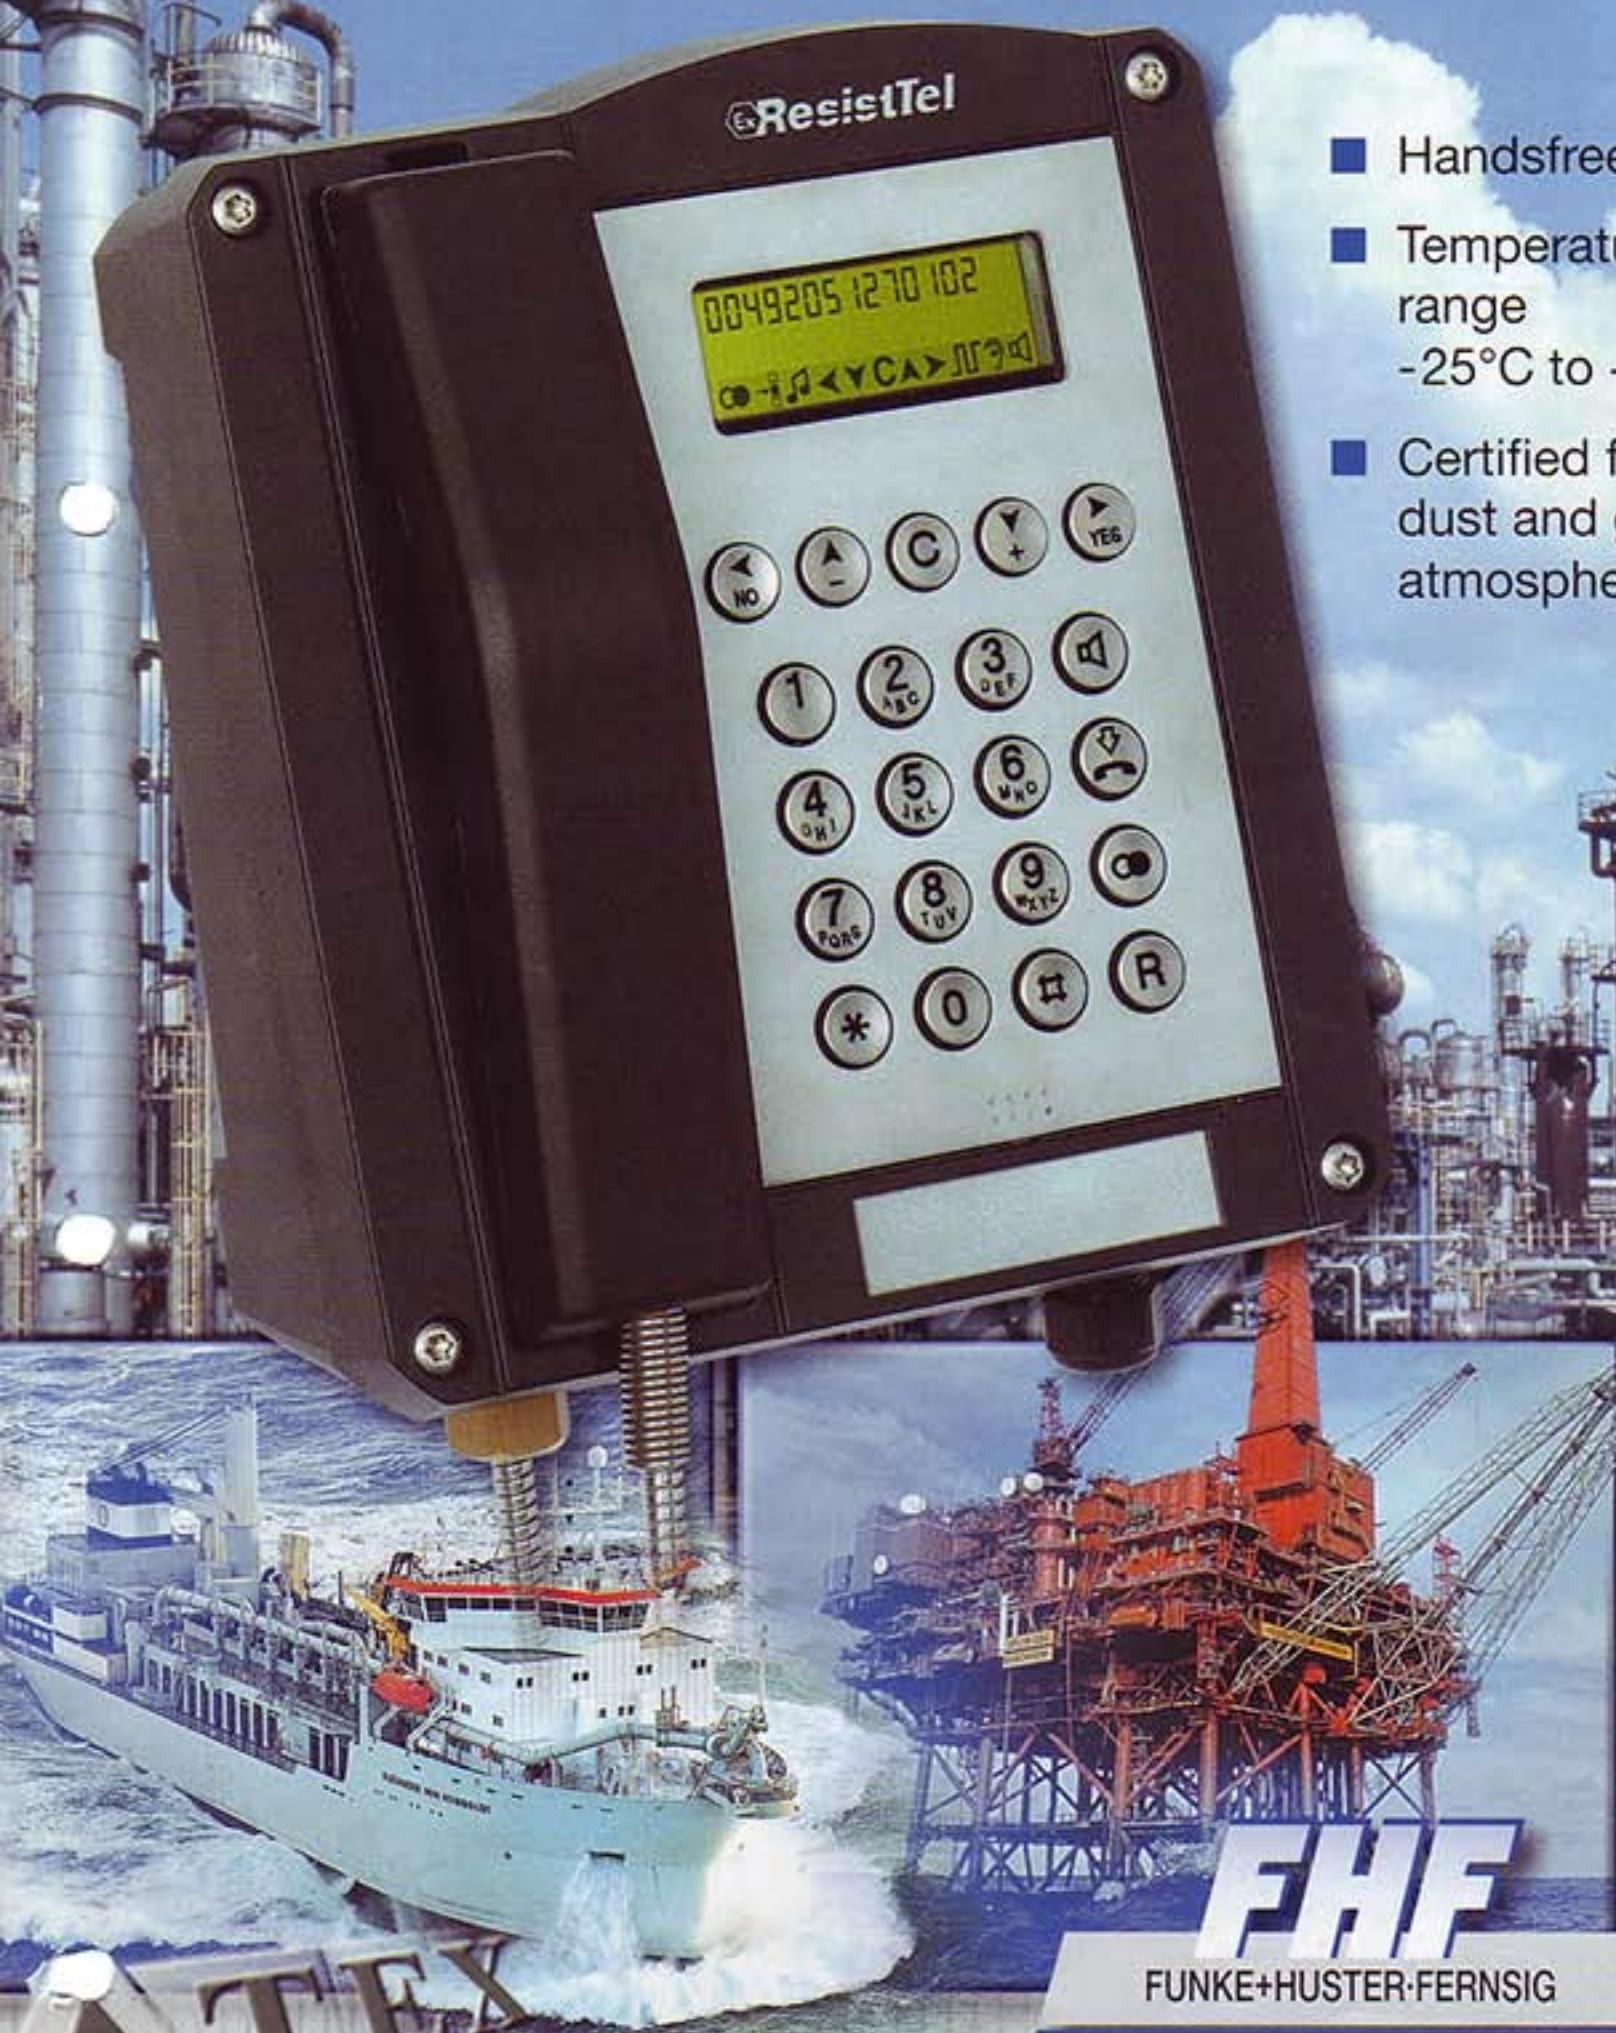

- Handsfree
- Temperature range  
-25°C to +60°C
- Certified for  
dust and gas  
atmospheres

**FHF**

FUNKE+HUSTER+FERNSIG

*Protecting People*



# Robust, explosion-proof, weatherproof telephone system for rugged ambient conditions

## AREAS OF USE

Communication devices for use in hazardous areas in the industry have to be especially well adapted to the extreme operating conditions they will be exposed to.

Our new Ex-telephone has been developed for operation in the petrochemical industry, on off-shore plants, in mills and harbours, which means it is resistant to large temperature differences, air humidity, sea water, dust and strong mechanical wear and tear. It is certified for use in hazardous dust and gas atmospheres.

The Ex-ResistTel is completely programmable, and has been equipped with a 21-piece stainless (V4A) steel keypad designed for use with gloves. Letters and figures are presented clearly on the alphanumeric display. The Ex-ResistTel also boasts all the convenient features that have become standard in the field of office communication.

A string of optional extras and components – especially certified for hazardous areas – makes our telephone even more functional.

## MAIN PERFORMANCE DATA

- Protection IP 66
- Impact protection IK 09
- Operations temperature -25°C to +60°C
- Stainless steel (V4A) keypad
- Steel armoured handset cord with snap-protection
- Sound pressure level approx. 90 dB(A)
- Receiver volume can be boosted in 7 steps from 0 – 12 dB(A)
- Integrated adjustable stabilizer bracket
- Connections for external loudspeaker
- Handsfree operation
- Telephone directory

Our Ex-ResistTel is the correct decision for a safe connection – convenient and reliable in hazardous areas.



### Display

The two uppermost lines display the number or the menu settings. The lower line displays pictograms that correspond to the functions. Menu language optional German or English (Please ask us about any other languages.)

### Function keys

Using these keys you may alter settings directly or make permanent changes to settings in the menu.

### Loudspeaker button

This button switches the loudspeaker or the handsfree operation feature on/off.

### Disconnect key

Disconnect a call using this key.

### Last number redial

Use this key to redial any one of the last dialed numbers.


### Inquiry key

With this key the functions of the PABX will be activated (flash).

### Handsfree operation

### Number keys

Use these keys to enter telephone numbers or texts.

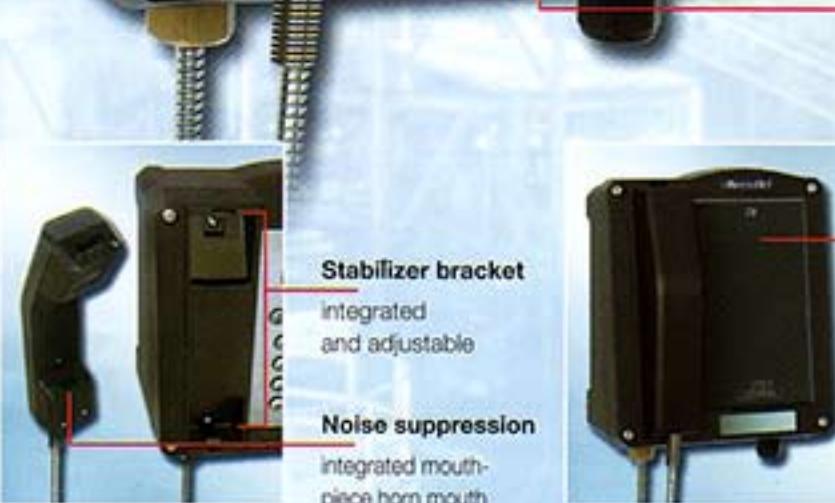

### Option

customized Logo on request

### Version without keypad


Emergency telephone – connects directly to the main PABX.



## SYSTEM ACCESSORIES

### HEADSET

- ▶ For Ex-ResistTel
- ▶ Designed for use in noisy work environments
- ▶ Extensive freedom of movement
- ▶ You may work with both hands

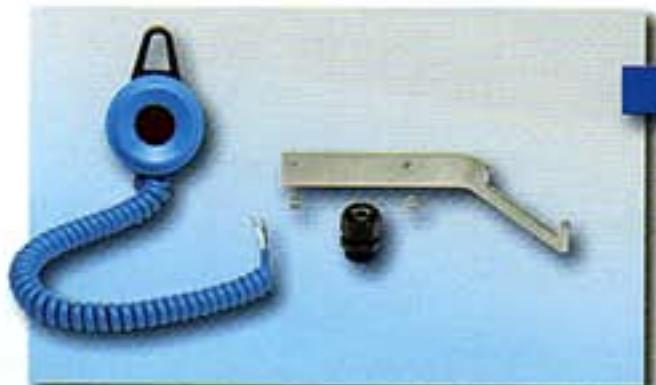

### ADDITIONAL EARPIECE

- ▶ For Ex-ResistTel
- ▶ Designed for use in noisy work environments
- ▶ A second person may listen in
- ▶ Protect both your ears against work noise



### LOUDSPEAKER SET

- ▶ For Ex-ResistTel
- ▶ For additional ringing signal and voice broadcasting
- ▶ Supports the handsfree operation



### SECONDARY SOUNDER

EEx-telecommunications-signal-combination

- ▶ Explosion-proof optical and acoustic telephone secondary sounder for loud work environments
- ▶ ATEX-certified



### SECONDARY SOUNDER

EEx acoustic secondary sounder

- ▶ High power explosion-proof secondary sounder for indoors and outdoors
- ▶ No additional power supply
- ▶ ATEX-certified



### PROTECTION HOOD

- ▶ Acoustic hood for very loud work environments
- ▶ Noise reduction down to 25 dB(A)
- ▶ Galvanized iron plate or stainless steel

## Technical Data

### Connections

Types of protection	II 2 G EEx em[b] IIC T5 II 2 D IP66 T100°C -25°C <= Tg <= 60°C	II 2 G EEx em[b] IIC T6 II 2 D IP66 T80°C -25°C <= Tg <= 40°C
---------------------	--	---

Approval DMT 02 ATEX E 183

Line voltage 24 V<sub>DC</sub> to 66 V<sub>DC</sub>

Line current 15 mA<sub>DC</sub> to 100 mA<sub>DC</sub>

Ringing alternating current 24 V<sub>AC</sub> to 90 V<sub>AC</sub> (at 21...54 Hz ringing frequency)  
30 V<sub>AC</sub> to 90 V<sub>AC</sub> (at 16,6...54 Hz ringing frequency)

Ringing impedance Greater than 6,0 kΩ at 25 Hz and 24...90 V<sub>AC</sub>.  
Greater than 4,0 kΩ at 50 Hz and 24...90 V<sub>AC</sub>.

Inquiry key Flash function adjustable from 40ms to 399ms

Dialling procedure PD-DTMF operation to be set in the menu. DTMF operation according to the CCITT recommendation Q.23. PD operation where the pulse/pause ratio can be set to 1.5:1 or 2:1 in the menu.

W-conductor Connection for external secondary sounder.

Screw terminals Up to 4 mm<sup>2</sup> rigid. Up to 2.5 mm<sup>2</sup> flexible.

### Housing

Material Glass-fibre-reinforced polyester

Height x Width x Depth Approx. 266 mm x 227 mm x 135 mm

Weight Approx. 5.5 kg

Display 2-line alphanumerical display with pictograms.  
Visible area approx. 78 mm x 26 mm.

Keypad Metal keypad with ice protection.  
21 keys with ABC lettering for name entries.

### Receiver

Stabilizer bracket Integrated, adjustable stabilizer bracket.

Handset cord Stainless steel (V4A) armoured handset cord.

Receiver inset Dynamic receiver inset with leakage field spool for inductive coupling of hearing aids.

Mouthpiece Electret-foil microphone

Noise suppression Greater than 3dB due to integrated mouthpiece horn mouth.

### Environmental conditions

Degree of protection: IP 66 according to EN60529

Impact protection: IK 09 according to EN50102

Operation temperature: -25°C to +60°C for temperature class T5

-25°C to +40°C for temperature class T6

Storage temperature: -25°C to +70°C

### Further characteristics

Optical call signalling Display shows ( ( ( ) ) )

Ringing sound pressure level Approx. 90 dB(A) at 1m distance

Ringing melodies 10 melodies selectable

Listening by loudspeaker Maximum sound pressure level approx. 68 dB (A) at 1m distance.



Handsfree operation Maximum sound pressure level approx. 68 dB (A) at 1m distance.

Amplified listening in receiver Receiver volume can be boosted in 7 steps from 0–12 dB(A).


Menus German and English

Telephone directory Max. 50 entries (names and numbers)

### Dimensions

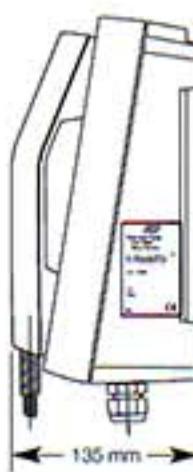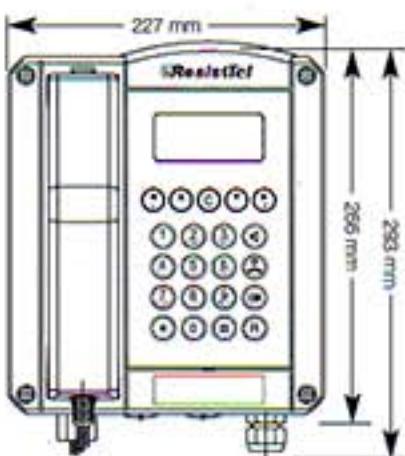

Blind plug M20 x 1.5

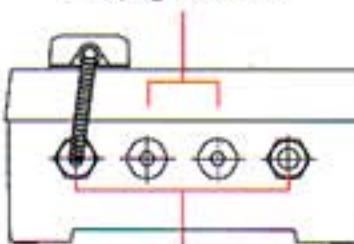

Cable gland M20 x 1.5

\* The complete product number (P/N) can be found by combining the P/N and the colour code of the cap colours.

## Ordering Data

Type	Product name	Version	P/N	Type	Product name	Version	P/N
Ex-ResistTel	EEx II telephone		112 861 01	Accessories	EEx II secondary sounder		211 842 06
Ex-ResistTel	EEx II telephone ZB	without Keypad and Display	112 861 02	Accessories	Protection hood galvanized		118 901 01
Accessories	EEx II additional earpiece		112 861 03	Accessories	Protection hood stainless steel		118 901 11
Accessories	EEx II additional headset		112 861 04	Accessories	EEx II TWIN		118 833 ..*
Accessories	EEx II loudspeaker set		112 861 05	Cap colours: transparent 01, red 02, yellow 03, green 04, blue 05			