



DNH^{AS}

N-3770 Kragerø
NORWAY
Phone: (47) 35 98 56 00
Fax: (47) 35 98 56 10
E-mail: dnh@dnh.no
Web-site: www.dnh.no

ISO 9001 CERTIFIED

VES-561(T)


DNH WW Ltd. Phone: (44) 1908 275 000
England Fax: (44) 1908 275 100
E-mail: dnh@dnh.co.uk
DNH GmbH Phone: (49) 040 6569 30-0
Germany Fax: (49) 040 6569 30-30
E-mail: dnh@dnh.de

cutout diameter 143-147mm

2x M20 knock out
2x M12 knock out

2x M20 knock out

1:

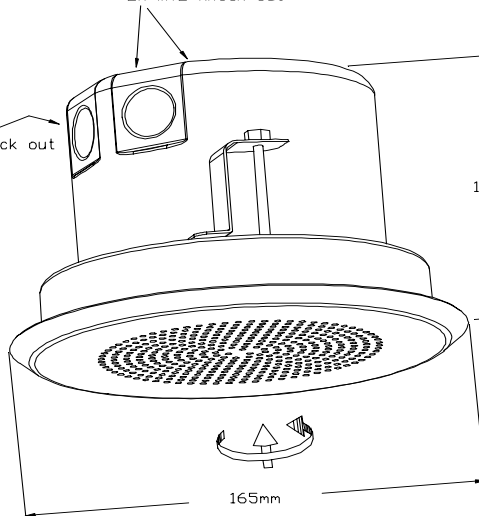


Transformer:
100 Volt line
White : Black 100V

Secondary nominal tapings:

common : 4 6,0W
common : 3 3,0W
common : 2 1,5W

Acc. British Standard 5839

1W/1m Pink Noise 1/3 octave bands

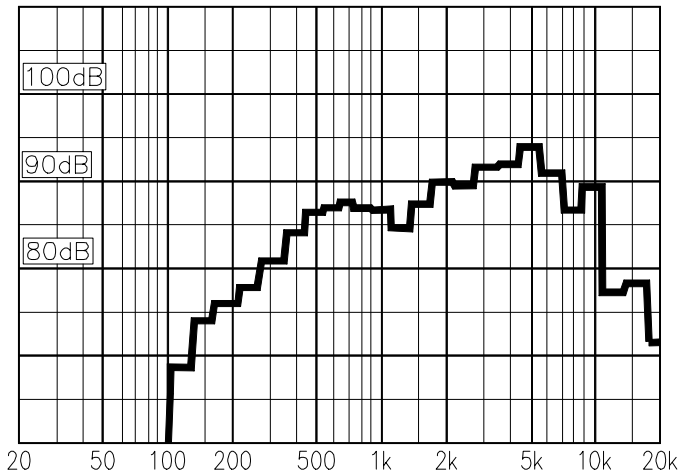

Material / Colour Steel / White
Mounting 3 screws
Termination Ceramic terminals
Weight kg
IP-rating
Max. / min. amb. temp 120°C / -20°C
Standard version 100 V transformer
Rated / max. power 6 W / 8 W
SPL 1W/1m 90 dB
SPL rated power 97 dB
Effective freq. range 250 – 12000 Hz
Dispersion (-6dB) 1kHz / 4kHz 185° / 80°
Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- Install box by turning 3 screws clockwise and the 3 hooks will keep loudspeaker in position. Connect cable to terminal and screw loudspeaker grill clockwise into fixed position.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker can also be fitted with a plastic grille, VES-561p(T).
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

